


张力传感器 TENSION SENSOR HLT 张力传感器 HLT Tension Sensor



- Maximum capacity (E_{max}) 额定载荷 (kg):
10, 25, 50, 100
- Be suitable for measuring the tension
应用于张力测量

外形尺寸 Dimensions(in mm)

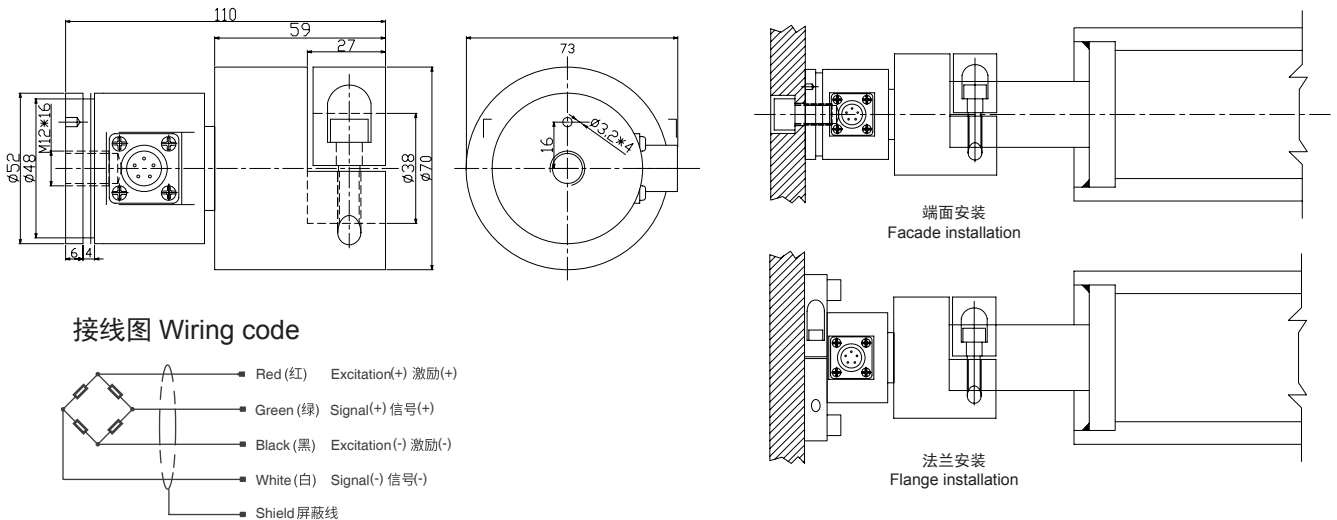

接线图 Wiring code



技术参数 Specifications

| | | |
|---------------------------------------|-------|-----------------|
| 额定载荷 Rated Load | kg | 10, 25, 50, 100 |
| 额定输出 Rated Output | mV/V | 1±0.1% |
| 零点平衡 Zero Balance | %R.O. | ±1 |
| 综合误差 Comprehensive Error | %R.O. | ±0.3 |
| 推荐激励电压 Recommended excitation voltage | VDC | 5-12 / 15(max) |
| 输入 / 输出阻抗 Input / Output impedance | Ω | 380±10 / 350±5 |
| 绝缘阻抗 Insulation resistance | MΩ | ≥5000 (50VDC) |
| 安全 / 极限过载 Safe / Ultimate overload | %R.C. | 150 / 300 |
| 弹性元件材料 Material | | Alloy Steel 合金钢 |
| 防护等级 Degree of protection | | IP65 |
| 电缆线长度 The length of the cable | m | 3 |